


2.54mm pitch

IDC Shrouded Header

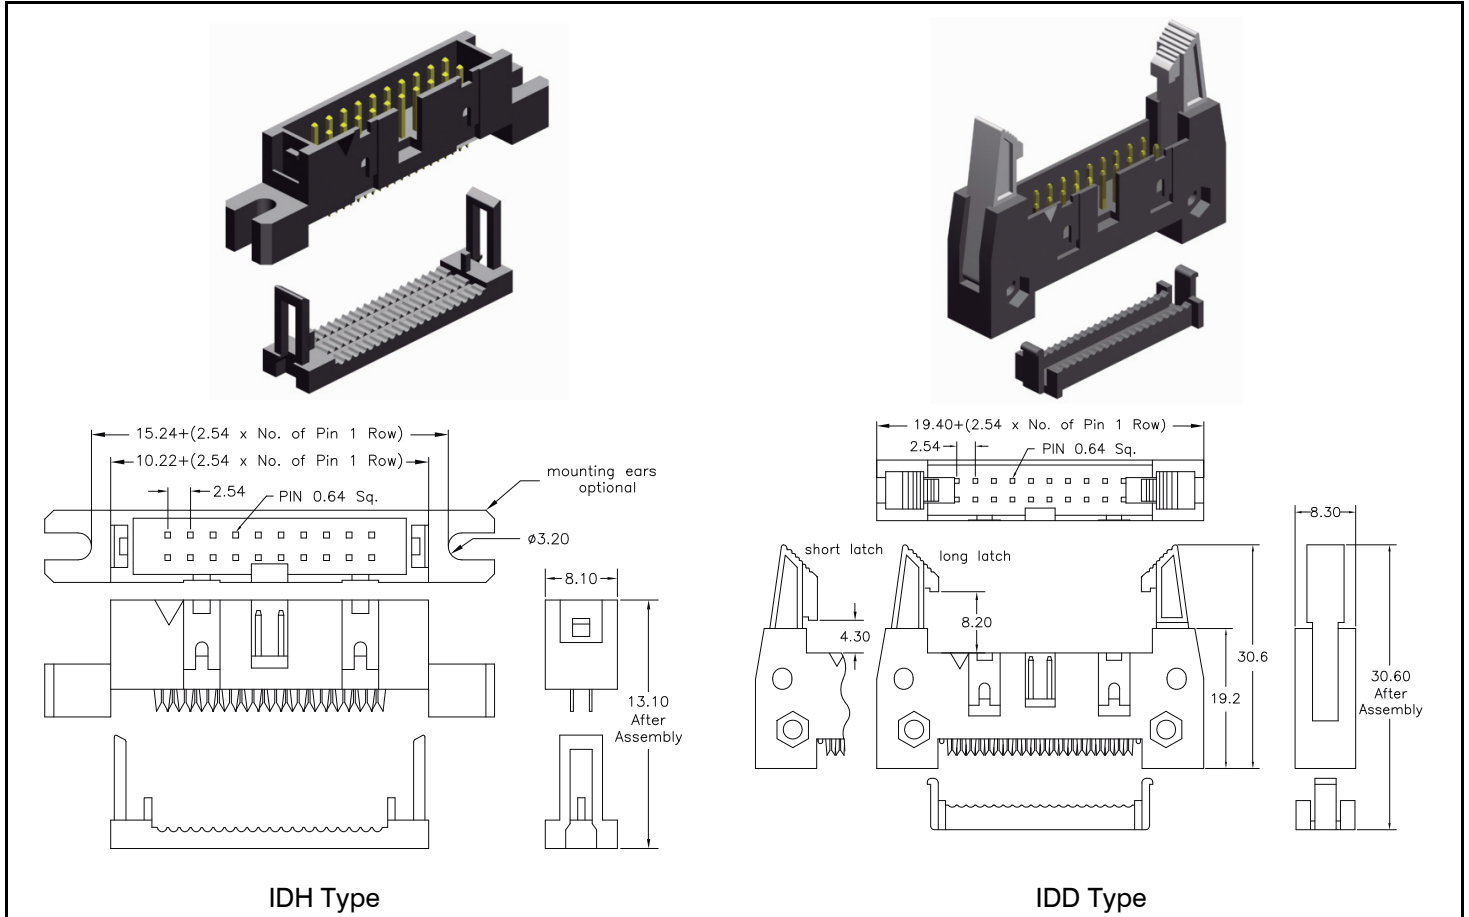

SPECIFICATIONS

Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Contact material	(RoHS compliant) Phosphor bronze
Withstanding voltage	500 V AC	Insulator material	(RoHS compliant) P.B.T. UL 94 V-0

APPLICATION AND FEATURES

Designed to mate with 2.54mm IDC female headers.
 Header type is available with or without mounting ears.
 DIN Header type is available with long & short eject latches.

How to order

ID X - xxx - X 100 - 95

