


APPLICATION AND FEATURES

- **Standard: tray packing and without "pick & place pad"**
- Also available "reel" packing
- Mating devices for female headers, solder tail and IDC Type
- Reliable flat cable to PCB connection
- No ejector latches for space saving

PCB Surface Mount Layout

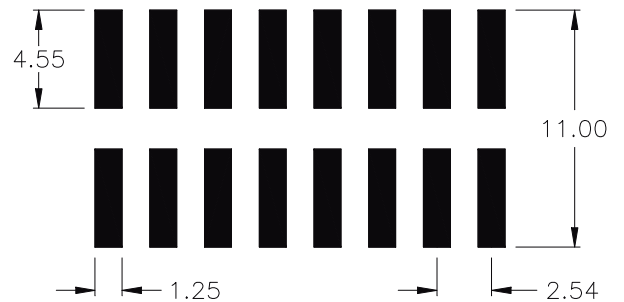

SPECIFICATIONS

Current rating	3 A
Insulator resistance	1000 MΩ min.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material (RoHS compliant)	Brass
Insulator material (RoHS compliant)	Nylon UL 94 V-0

How to order

SLS - xxx - H 885 - 55 / X

Nbr of pins
006; 008; 010; 012
014; 016; 020; 024
026; 030; 034; 040
044; 050

Plating
55 = gold
Other platings on request

Packing and "pick & place pad" Option
F = tray packing; with pick & place pad
T = tube packing; without pick & place pad
A = tube packing; with pick & place pad
B = reel packing; with pick & place pad