


APPLICATION AND FEATURES

- Mating devices for female headers, solder tail and IDC Type
- Reliable flat cable to PCB connection
- No ejection latches for space saving

PCB Hole Layout

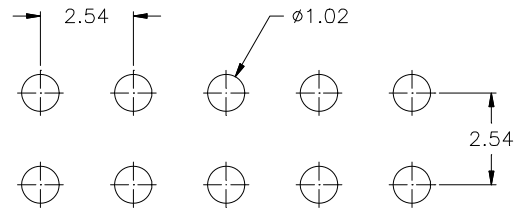

SPECIFICATIONS

Current rating	3 A	Operating temperature	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Contact material	Brass (RoHS compliant)
Withstanding voltage	500 V AC	Insulator material	P.B.T. (RoHS compliant) UL 94 V-0

How to order

SLS - xxx - X xxx - 55

Nbr of pins	Style	Pin code for "Dxxx" = raised style	DIM "A" (mm)	DIM "B" (mm)	DIM "C" (mm)	Plating
S & R Version: 006; 008; 010; 012; 014; 016 020; 024; 026; 030; 034; 040 044; 050; 060; 064 D Version 006; 008; 010; 012; 014; 016 020; 024; 026; 030; 034; 040 050; 060; 064	S920 = straight R920 = right angle Dxxx = raised style	141 166 232 235	5.00 7.50 14.10 14.40	3.00 3.00 3.00 3.00	14.10 16.60 23.20 23.50	55 = gold Other platings on request
Other dimensions on request						