


**APPLICATION AND FEATURES**

- **Standard:**  
*without locating pegs, tray packing and without "pick & place pad"*
- Also available "tape & reel" packing
- Designed to mate with IDC female connector IDS-xxx-X 200-95/P
- Reliable flat cable to PCB connection
- No ejection latches for space saving

**PCB Surface Mount Layout**

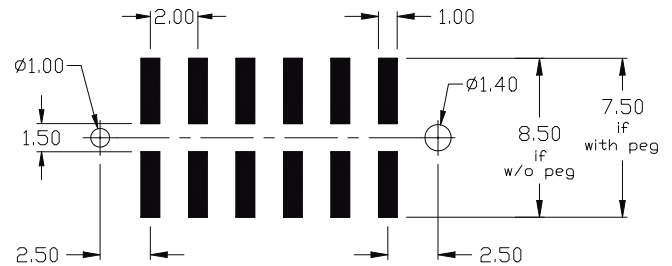

**SPECIFICATIONS**

Current rating	1 A
Insulator resistance	1000 MΩ min.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material	(RoHS compliant) Copper Alloy
Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SLS - xxx - H 562 - 55 /2 X

Nbr of pins
without "locating pegs" <b>006 to 068</b>
except: 038; 042; 046; 048 052; 054; 056; 058 062; 066
with "locating pegs" <b>008 to 050</b>

Plating
<b>55</b> = gold
Other platings on request

Packing and "pick & place pad" Option
<b>without "locating pegs"</b>
<b>F</b> = tray packing; with pick & place pad
<b>T</b> = tube packing; without pick & place pad
<b>A</b> = tube packing; with pick & place pad
<b>B</b> = reel packing; with pick & place pad
<b>with "locating pegs"</b>
<b>C</b> = tube packing; without pick & place pad
<b>D</b> = tube packing; with pick & place pad
<b>E</b> = reel packing; with pick & place pad