


**APPLICATION AND FEATURES**

- Designed to mate with IDC female connector IDS-xxx-X 200-95/P
- Reliable flat cable to PCB connection
- No ejection latches for space saving

**PCB Hole Layout**

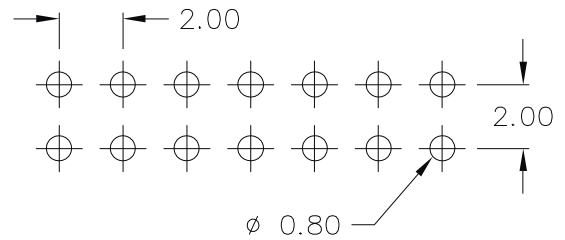

**SPECIFICATIONS**

Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Contact material	(RoHS compliant) Copper alloy
Withstanding voltage	500 V AC	Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

**SLS - xxx - X xxx - 55 /2**

