


ORDER	FINISHED
A601-900A1	GOLD
A601-901A1	NICKEL

**ELECTRICAL RATINGS:**

1. Impedance : 50 ohms
2. Frequency Range : 0~12.4GHz
3. Working Voltage : 500 Vrms maximum
4. Dielectric Withstanding Voltage : 1000 Vrms maximum
5. Insulator Resistance : 5000 Megohms minimum

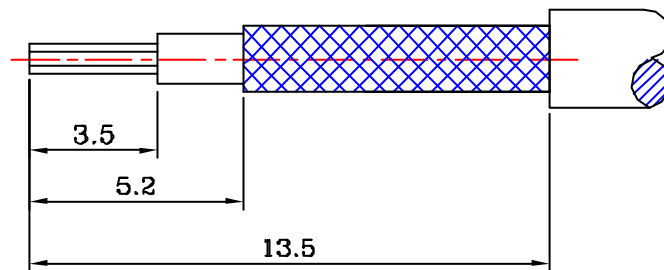

Recommended Cable Stripping Dim's

3	FERRULE	BRASS	GOLD/NICKEL
2	CONTACT	BRASS	GOLD 30U"
1	SHELL	BRASS	GOLD/NICKEL
	GASKET	SI.RUBBER	NONE
	"C" RING	BE.COPPER	NONE
	INSULATOR	TEFLON	NONE
	BODY	BRASS	GOLD/NICKEL
ITEM	DESCRIPTION	MATERIALS	FINISHED

REV.	DESCRIPTION	ECN	DRAWN	DATE	TOLERANCES: DIM. XX=±0.3 UNIT: mm XXX=±0.15	CHECKED:	APPROVAL:	LAYER: ASY	REV. C	P/No.: A601-90*A1
C	SEE ECN	01-239	TINA	08-08'2001	REMARKS:	TITLE: SMA STRAIGHT PLUG CRIMP TYPE FOR RG58,141/U CABLE		SHEET: 1 OF 1 SCALE: 5:1		
B	SEE ECN	00-167	TINA	06-07'2000		DESIGNED: TINA 03-14'2000	DRAWN: TINA 03-14'2000	DWG NO.: S-A601		
A	NEW RELEASE	00-056	TINA	03-14'2000						
REVISIONS										