

RoHS Compliant







SPECIFICATION :

1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.


2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
 - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

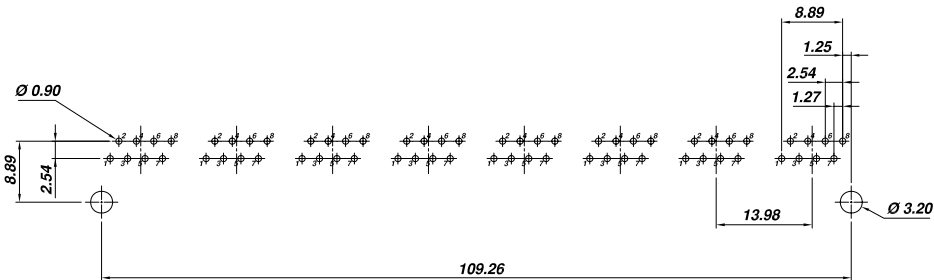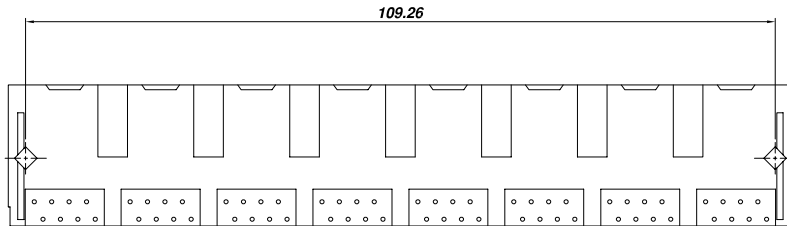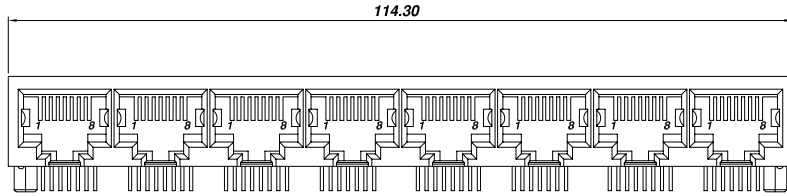

PCB LAYOUT
(Top View)





AJ-040-8-F-XX

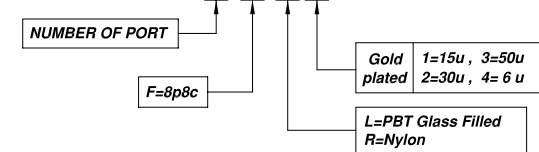

TITLE	1x8 8POSITIONS SIDE ENTRY PCB GANG JACK UL & cUL FILE NO. E131820
	MODULAR JACKS ASSY FOR AJ-040-8-F-XX
	SCALE SIZE DWG. NO. 9638 SERIES

DWG. NO. AST040006-2	NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. <i>Steven</i>	DATE JAN-08'08
	THIRD ANGLE PROJECTION	LINEAR	MM INCH	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D <i>Johnn</i> APP'D <i>Billy</i>
	MM INCH	ANGLE +0° 30'	RADIL	+0.45 -0.15		JAN-08'08

RoHS Compliant

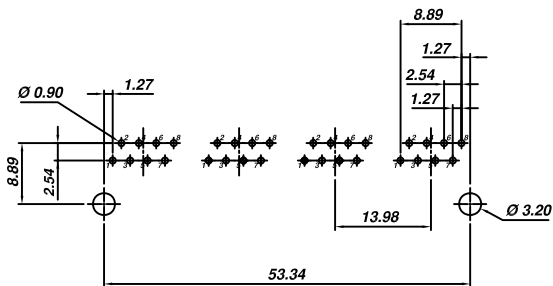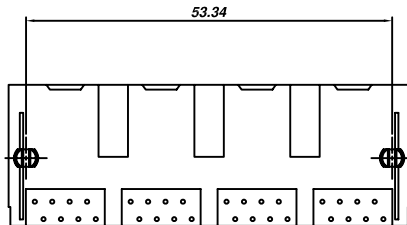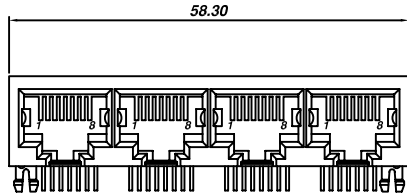

PCB LAYOUT
(Top View)

SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
 - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.





AJ-040-4-F-XX

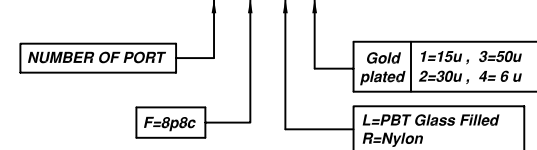

TITLE	1x4 8POSITIONS SIDE ENTRY PCB GANG JACK UL & cUL FILE NO. E131820
	MODULAR JACKS ASSY FOR AJ-040-4-F-XX
	SCALE SIZE DWG. NO. 9638 SERIES

DWG. NO.	AST040003-2	NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR.	DATE	
		THIRD ANGLE PROJECTION	LINEAR	MM INCH	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	Steven CK'D John APP'D Billy	DEC-03 '07 DEC-03 '07 DEC-03 '07
		MM INCH	ANGLE +0°30'	RADIL	+0.45 -0.15			

RoHS Compliant

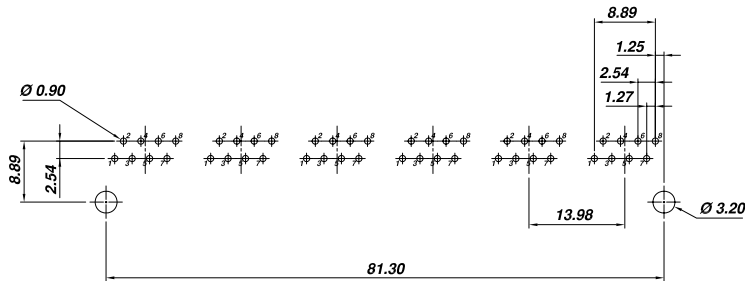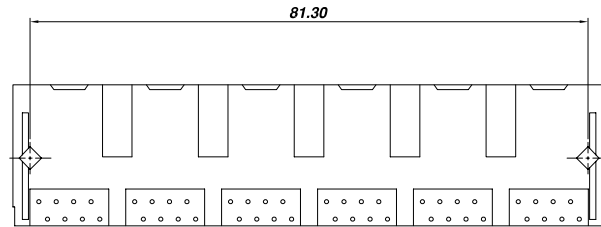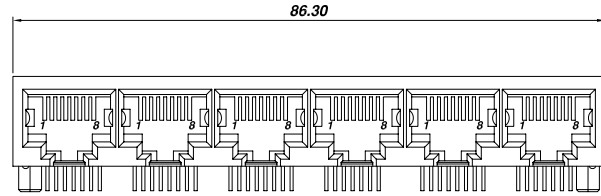

PCB LAYOUT
(Top View)

SPECIFICATION :


1. Electrical Char.

- Insulation Resistance : 500M-Ohm Min.
- Contact Resistance : 20milli-Ohm Max.
- Rating Current : 1.5A Max.
- Rating Voltage : 120V AC.
- Dielectric Voltage : 1,000 Vrms 60 Sec. Min.

2. Physical char.

- Housing (Option) :
 - PBT Glass Filled (UL 94V-0), Soldering Temperature:235°C
 - Nylon (UL 94V-0), Soldering Temperature:260°C
- Color : Black Color
- Spring Wire :
 - 0.45mm Dia. Phosphor bronze Gold Plating Over Nickel
- Temperature Range : - 40°C / +85°C
- Durability : 500 Mating cycles Min.

AJ-040-6-F-XX

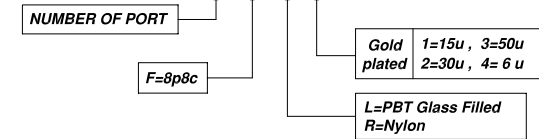

TITLE	1x6 8POSITIONS SIDE ENTRY PCB GANG JACK UL & cUL FILE NO. E131820
	MODULAR JACKS ASSY FOR AJ-040-6-F-XX
	SCALE SIZE DWG. NO. 9638 SERIES

NOT SCALED DRAWING	TOLERANCE UNLESS OTHERWISE NOTICE	INCH	MM	DR. <i>Steven</i>	DATE JAN-08'08
THIRD ANGLE PROJECTION	LINEAR $\frac{MM}{INCH}$	00±0.01 000±0.005 0000±0.002	00±0.25 000±0.13 0000±0.05	CK'D <i>Johnn</i>	JAN-08'08
$\frac{MM}{INCH}$	ANGLE +0°30'	RADIL	+0.45 -0.15	APP'D <i>Billy</i>	JAN-08'08

DWG. NO.
AST040005-2