




## SECTION 2A

### STANDARD SCREW TYPE PRINTED CIRCUIT CONNECTORS

GSK720V

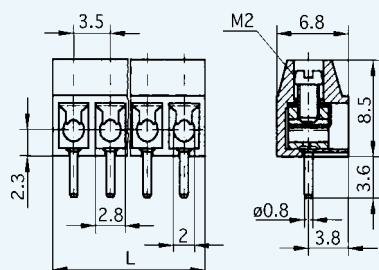

GSK720H

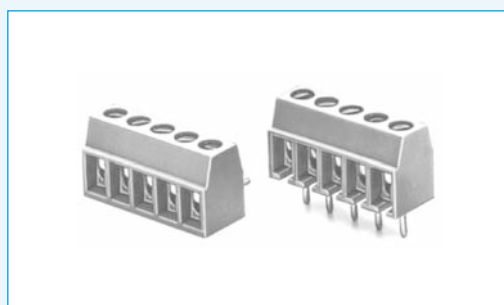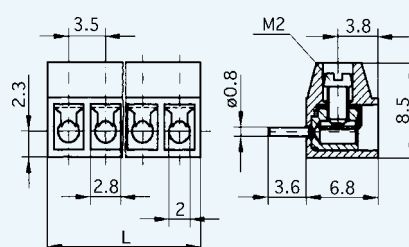


## FEATURES

**Series GSK720** connectors have a pin spacing of just 3.5mm and are the smallest type available in this range of connectors. They are available in both side entry (type V) and top entry (type H) and can be supplied with or without wire protectors in 2 to 16 pole lengths.

## TECHNICAL DATA

<b>Mouldings:</b>	PBT, GV30, blue, UL94 V0
<b>Inserts :</b>	Brass, tinned
<b>Screws:</b>	M2, steel, zinc plated and passivated
<b>Wire protectors:</b>	Stainless steel
<b>Current rating:</b>	6 amp (To EN 60335-1)
<b>Conductor size:</b>	With protectors - 1.0mm <sup>2</sup> Without - 1.5mm <sup>2</sup>
<b>Stripping length:</b>	4.5mm
<b>Maximum temp:</b>	120°C
<b>Pin spacing:</b>	3.5mm
<b>Recommended hole dia. in p.c. board:</b>	1mm

## APPROVALS

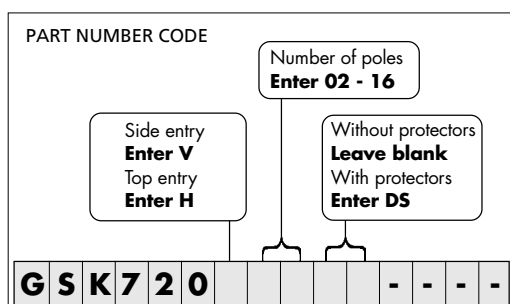

## OPTIONS

**Marking:** consecutive numbering, lettering or special printing available. Please provide sketch.

**Colour:** also available in black, minimum quantities may apply.

**Spacing:** 7mm also available. Please enquire for details.