


## SECTION 2A

### STANDARD SCREW TYPE PRINTED CIRCUIT CONNECTORS



$$L = \text{Number of poles} \times 10 \text{ less } 3.5$$

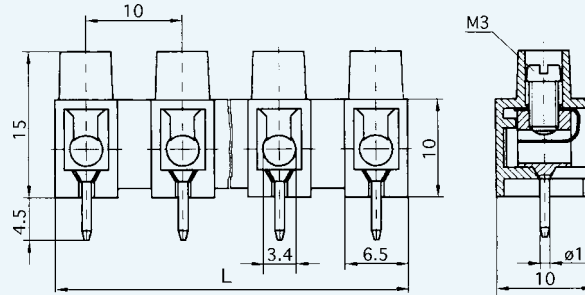


### FEATURES

**Series GSK801** connectors provide a simple connection to the circuit board via screw terminals and solder pins. They are 10mm pitch and are available from 2 to 12 pole. All types are available with or without wire protectors.

### TECHNICAL DATA

<b>Mouldings:</b>	Nylon 6.6, white, UL94 V2
<b>Inserts:</b>	Brass, tinned
<b>Screws:</b>	M3, steel, zinc plated and passivated
<b>Wire protectors:</b>	Stainless steel
<b>Current rating:</b>	10 amp (to EN 60335-1)
<b>Voltage rating:</b>	380V ~
<b>Tracking distance:</b>	KB>600
<b>Conductor size:</b>	Without w/p Up to 6mm <sup>2</sup> With w/p Up to 2.5mm <sup>2</sup>
<b>Stripping length:</b>	7mm
<b>Maximum temp:</b>	100°C
<b>Pin spacing:</b>	10mm
<b>Recommended hole dia. in p.c. board:</b>	1.3mm

### APPROVALS

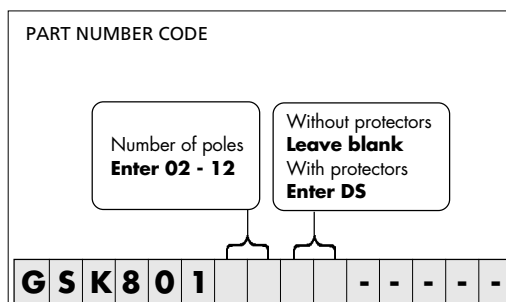

### OPTIONS

**Marking:** consecutive numbering, lettering or special printing available. Please provide sketch.