


1.00mm pitch Board Spacer


- SMT - dual row

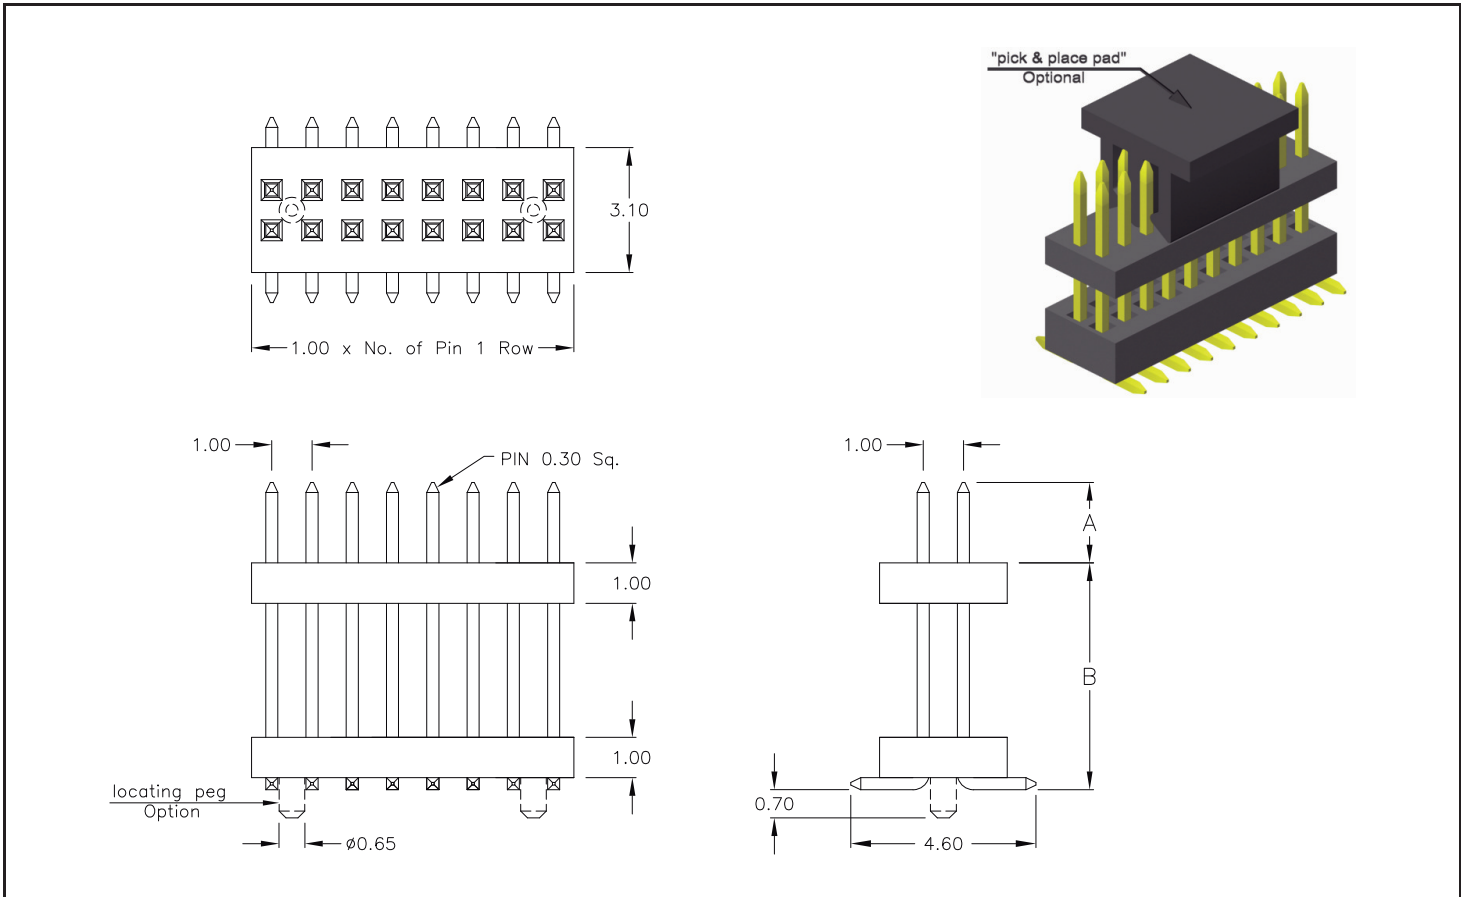

SPECIFICATIONS

Current rating	1 A
Insulator resistance	100 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material (RoHS compliant)	Copper alloy
Insulator material (RoHS compliant)	Nylon UL 94 V-0

PCB Surface Mount Layout

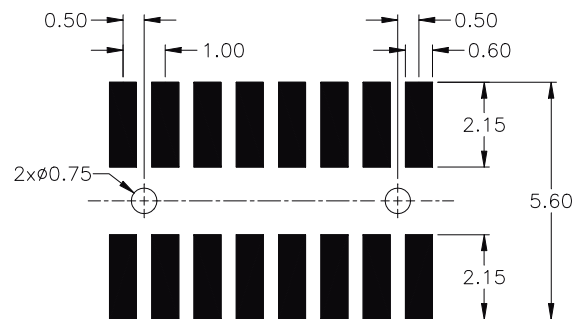

How to order

SP2 - xxx - H 51/x - 55 /00 X

Nbr of pins	Pin code	DIM "A"	DIM "B"	Plating	Packing and "pick & place pad" Option
008 to 100	51/0	2.00 mm	7.80 mm	55 = gold	without "locating pegs" A = tube packing; with pick & place pad B = reel packing; with pick & place pad
	Other dimensions on request			Other platings on request	with "locating pegs" C = tube packing; without pick & place pad D = tube packing; with pick & place pad E = reel packing; with pick & place pad