

# Distributor SERIES

## Distribution Systems Specifications

### Distributor Series


#### Description

Push Lock Type, Standard

#### Figure



#### Drawing

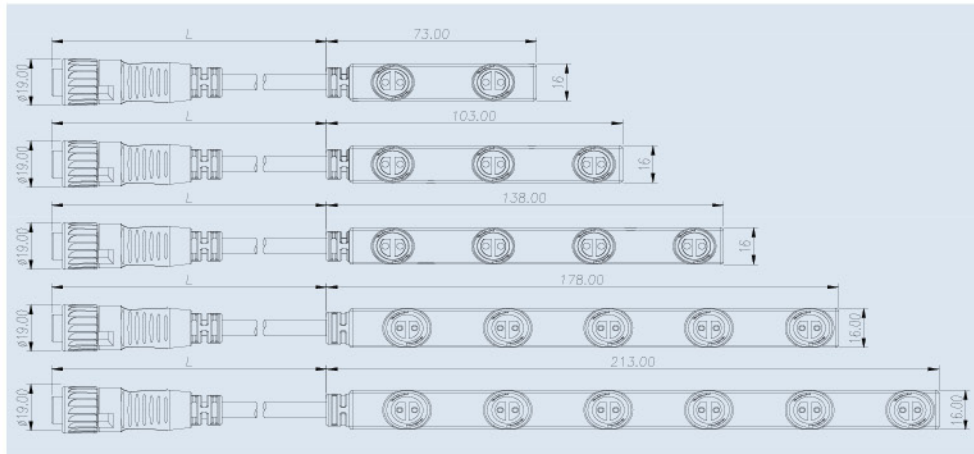

#### Part Number

Contacts	Ways	Connection Type	Part Number	Contacts	Ways	Connection Type	Part Number
2	2	In Series	44002030-01-XXX	2	2	In Parallel	44002030-11-XXX
	3		44002030-02-XXX		3		44002030-12-XXX
	4		44002030-03-XXX		4		44002030-13-XXX
	5		44002030-04-XXX		5		44002030-14-XXX
	6		44002030-05-XXX		6		44002030-15-XXX

#### Specifications

Number of Contacts	2
Wire Gauge	1.0mm <sup>2</sup> (17AWG)
Cable Range	3.5mm - 8.5 mm
Environmental Protection	IP67
Mechanical Life	500 mating cycles
Operating Temperature	- 45°C - 105°C
Voltage Rating	300V
Rated Current (40°C)	10A
Contact	Brass ,Ni Plated
Material of Housing	PA