
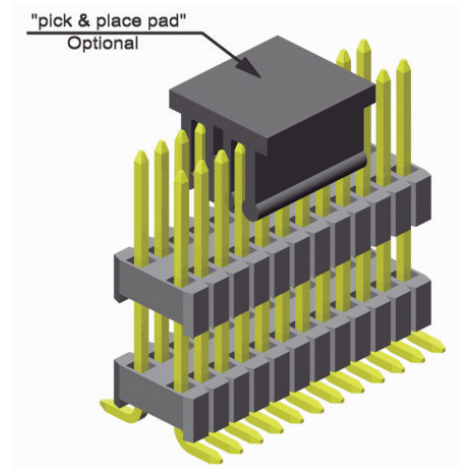
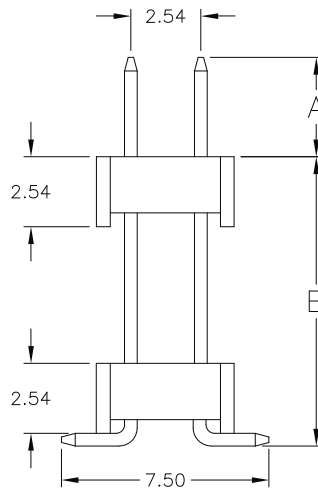
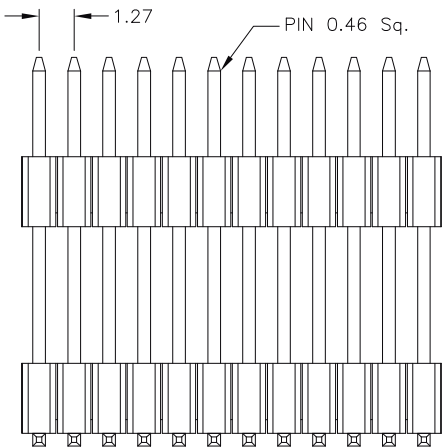



- SMT - dual row

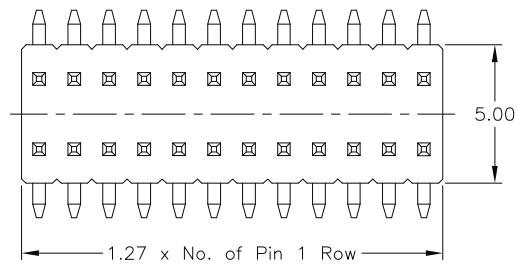

SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 5sec.
Contact material (RoHS compliant)	Brass
Insulator material (RoHS compliant)	Nylon UL 94 V-0

PCB Surface Mount Layout

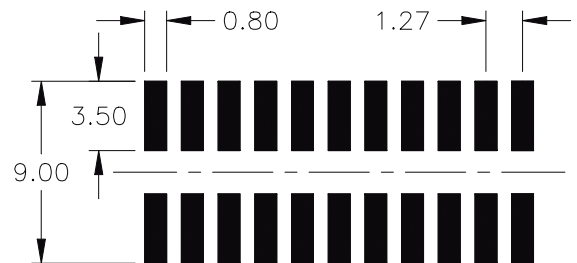

How to order

SP2 - xxx - H 220/x - 55 /1 X

Nbr of pins	Pin code	DIM "A"	DIM "B"	Plating	Packing and "pick & place pad" Option (standard tube packing; without pick & place pad)
006 to 100	220/0	5.60 mm	8.50 mm	55 = gold	A = tube packing; with pick & place pad B = reel packing; with pick & place pad
	220/1	5.60 mm	9.75 mm		
	220/2	3.40 mm	12.20 mm	Other platings on request	
	Other dimensions on request				