


Foot style: **085** **085** **185**


APPLICATION AND FEATURES

- **Standard: tube packing and without "pick & place pad"**
- Low Profile Insulator
- Assures reliable PC Board connections
- Mate with female header 2.00mm x 2.00mm pitch

PCB Surface Mount Layout



Foot style: **085** (dual row)

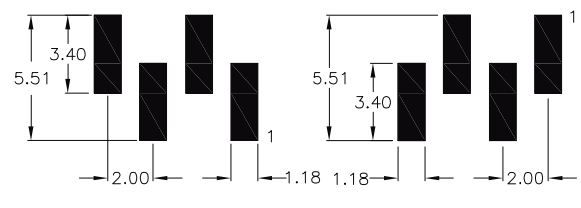

085 (single row)

185 (single row)

SPECIFICATIONS

Current rating	1 A	Operating temperature)	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Processing temperature	+250°C +0/-5°C for 5sec.
Withstanding voltage	500 V AC	Contact material	(RoHS compliant) Brass
		Insulator material	(RoHS compliant) Nylon UL 94 V-0

How to order

SS x - xxx - H xxx / x - **55** /2 X

Rows	Nbr of pins	Foot style	Pin code	DIM "A"	Plating	Packing and "pick & place pad" Option
1 single row	002 to 040	085 185 Pls. choose 085 style if odd pin count.	0 1 2 3 4 5 6 7	4.73 mm 6.00 mm 13.57 mm 6.50 mm 8.07 mm 7.62 mm 9.10 mm 10.00 mm	55 = gold Other platings on request	A = tube packing; with pick & place pad B = reel packing; with pick & place pad
2 dual row	004 to 080	085		Other dimensions on request		