



1.27mm pitch Female Header
 - THT - dual row straight & right angle

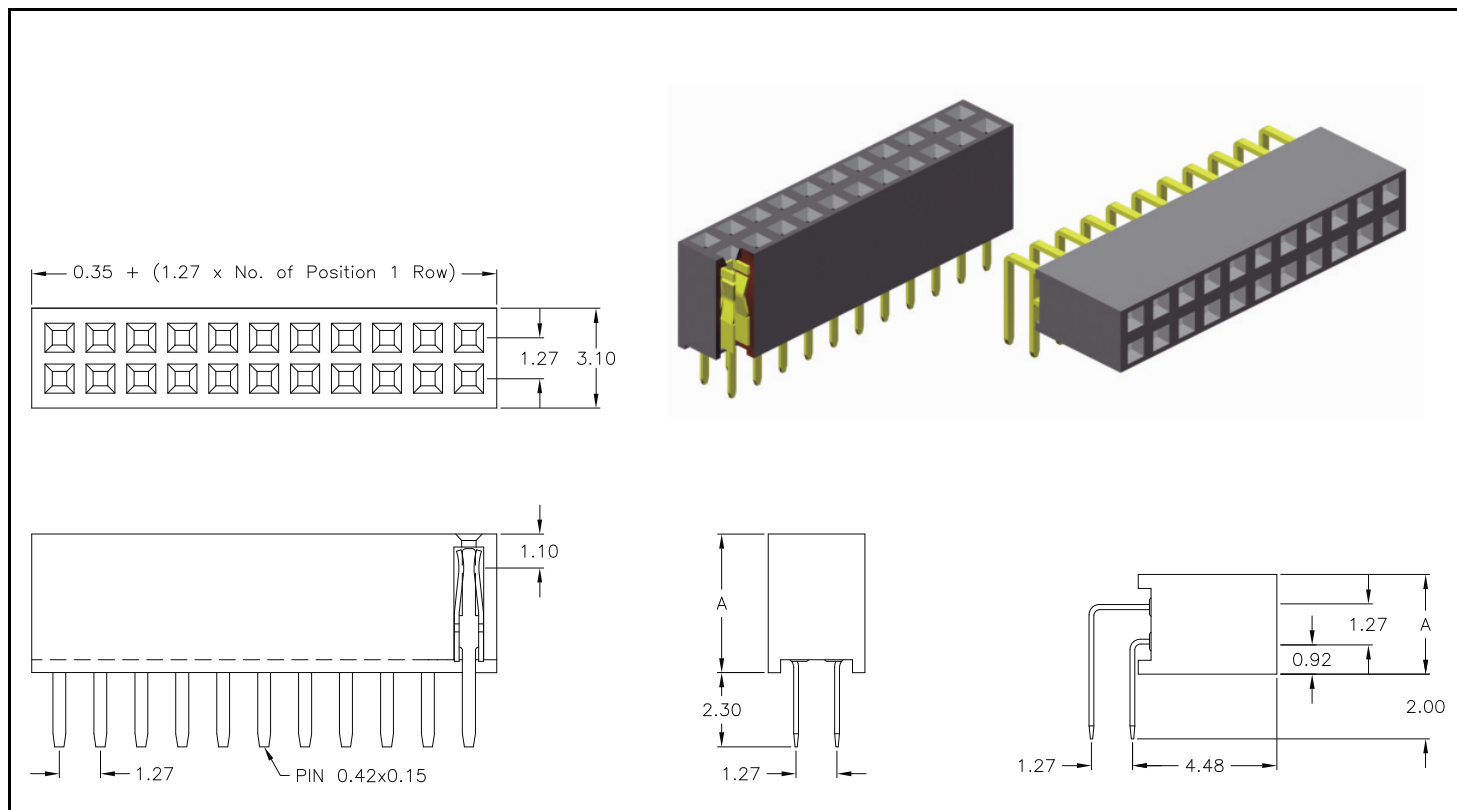

APPLICATION AND FEATURES

- 3.40 or 4.40mm height above board straight type
- Hi-rel dual beam contact assures reliable PC-Board connections
- Accepts 0.40mm square pins
- Stand-off's facilitate post solder cleaning
- Side stackable

PCB Hole Layout

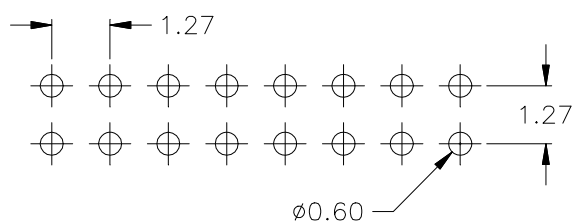

SPECIFICATIONS

Current rating	1 A	Operating temperature	- 40°C to +105°C
Insulator resistance	1000 MΩ min.	Contact material	Phosphor Bronze (RoHS compliant)
Contact resistance	20 mΩ max.	Insulator material	LCP (RoHS compliant)
Withstanding voltage	500 V AC		UL 94 V-0

How to order

BL 2 - xxx - X xxx - 55 / 11

Nbr of contacts	Connector style	DIM "A"	Plating
006 to 100	S340 straight	3.40 mm	55 = gold Other platings on request
004 to 100	S430 straight	4.40 mm	
004 to 100	R430 right angle	3.10 mm	