

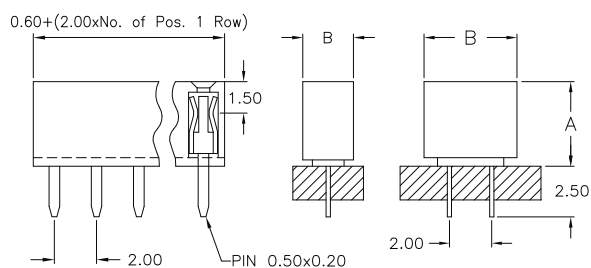
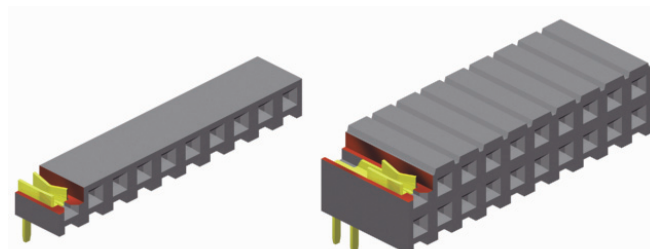


2.00mm pitch Female Header

- THT - low profile

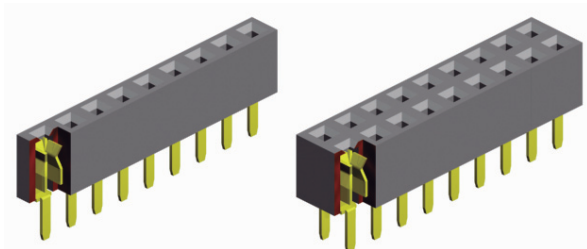

S 4xx

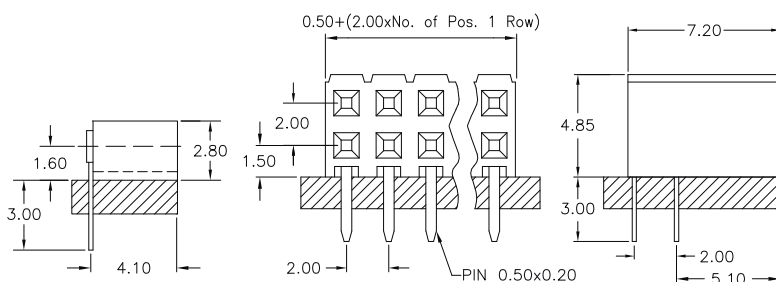


R 430

R 720

SPECIFICATIONS

Current rating	1 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC
Operating temperature	- 40°C to +105°C
Contact material	Phosphor Bronze
Insulator material	Nylon UL 94 V-0

PCB Hole Layout

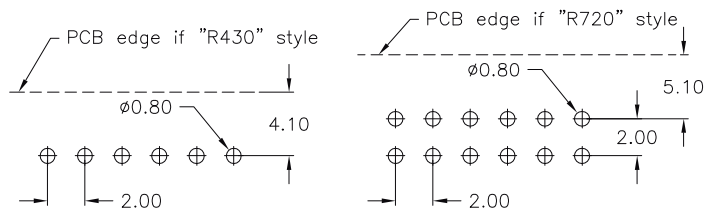

APPLICATION AND FEATURES

Low profile, 4.00mm and 4.30mm height single & dual row straight.
 Designed for board to board small spacing interconnection.
 High quality dual beam contacts mating with 0.50 x 0.50mm Pin Header.

How to order

BL x - xxx - X xxx - 55 /2

Rows	Nbr of contacts	Version	Plating
1 = single row	S400 & S430 = 002 to 040 R430 = 003 to 025	S 400 = straight – single row : "A"=4.00 mm "B"=2.20 mm straight – dual row : "A"=4.00 mm "B"=4.20 mm S 430 = straight – single row : "A"=4.30 mm "B"=2.40 mm straight – dual row : "A"=4.30 mm "B"=4.60 mm R 430 = right angle – single row R 720 = right angle – dual row	55 = gold Other platings on request
2 = dual row	S400 & S430 = 004 to 080 R720 = 004 to 080		