

Large Series

Product Display




Specification


| | | | | | | | | |
|-------------------------------------|--|---------------------------|-----------------------------|-----------------------------|---|--------|-------|-------|
| Lock Mechanism | Push Lock Type | | | | | | | |
| Pin Number | 3P | 3P | 9P | 18P | 24P | 3+9P | 3+11P | 2+18P |
| Rated Current | 20A | 50A | 5A | | | 20A+5A | | |
| Rated Voltage | 300V | | 125V | | | 300V | | |
| IP Rating | IP67 Mated | | | | | | | |
| Mating Cycle | 500 | | | | | | | |
| Operating Temperature | -40°C~105°C | | | | | | | |
| Wire Processing | Soldering / Screw Terminal | | | | | | | |
| Proposed Wire Gauge/mm ² | 12AWG / 3.31mm ² | 9AWG / 8.4mm ² | 18AWG / 0.75mm ² | 22AWG / 0.34mm ² | (2.5mm ² +0.2mm ²) / (14AWG+24AWG) | | | |
| Proposed Cable Diameter | 4.5-6.5mm, 6.5-10.5mm (Field Installable Plug), 13mm Max (Overmold Plug) | | | | | | | |
| Certification | UL1977, UL2238 for 3P | | | | | | | |

Critical Dimension

Panel Cut-Out(Circular & Square & Rhombus Version)

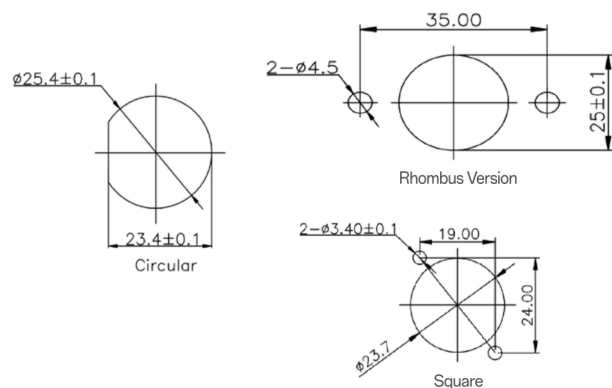

Field Installable Plug

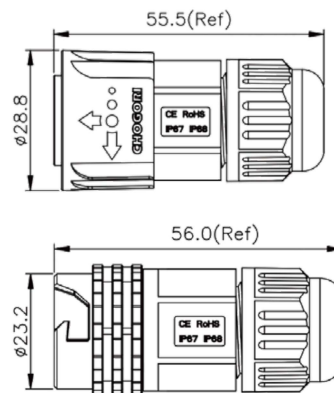

Overmold Plug(Straight & Right Angle Version)

