


Recommended PCB Hole

ORDER	FINISHED
B103-900A	GOLD
B103-901A	NICKEL

ELECTRICAL PERFORMANCE:

1. Impedance . 50 ohms
2. Frequency Range . 0~4 GHz
- 3 Working Voltage : 335 Vrms maximum
- 4 Dielectric Withstanding Voltage : 1000 Vrms maximum
5. Insulator Resistance : 1000 Megohms minimum

BODY	BRASS	GOLD/NICKEL
INSULATOR	TEFLON	NONE
CONTACT	BRASS	GOLD 30U"
INSULATOR	TEFLON	NONE
BODY	BRASS	GOLD/NICKEL
DESCRIPTION	MATERIALS	FINISHED

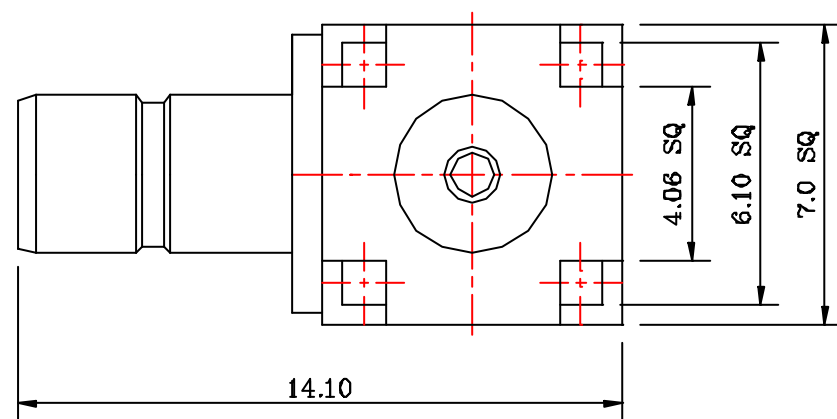

REV.	DESCRIPTION	ECN	DRAWN	DATE
E	SEE ECN	00-099	TINA	04-05'2000
A	NEW RELEASE	00-056	TINA	03-13'2000

REVISIONS

REMARKS.

TITLE:

SMB R/A JACK PCB RECEPTACLE

TOLERANCES.

DIM. XX-±0.3
UNIT: mm XX-±0.16

DESIGNED:

TINA
03-13'2000

DRAWN:

TINA
03-13'2000

SHEET:

1 OF 1

SCALE:

6:1

DWG NO.:

S-B103

LAYER:

SALE

APPROVAL:

REV. B



INPUT OUTPUT
INDUSTRIAL CO., LTD.

P/No : S-B103-90*A