



PCB Surface Mount Layout -single row-

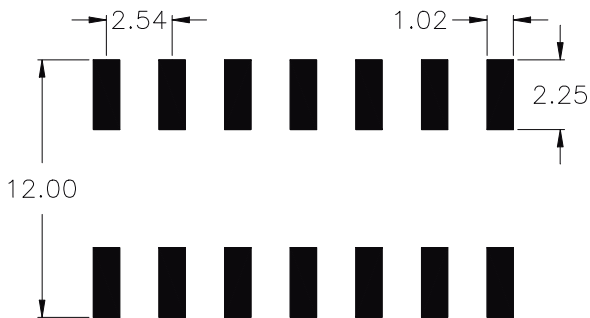

PCB Surface Mount Layout -dual row-

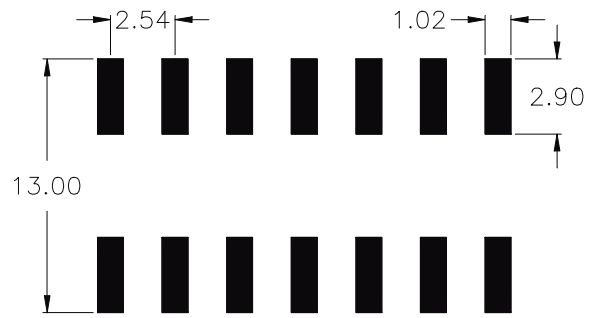

APPLICATION AND FEATURES

- **Standard: tube packing**
- Hi-rel dual beam contact assures reliable PC-board connections
- Accepts 0.64mm square pins
- Stand-off's facilitate post solder cleaning
- Lowest possible profile
- Automatic assembly to PCB possible

SPECIFICATIONS

Current rating	3 A
Insulator resistance	1000 MΩ min.
Contact resistance	20 mΩ max.
Withstanding voltage	500 V AC

Operating temperature	- 40°C to +105°C
Processing temperature	+250°C +0/-5°C for 10sec.
Contact material (RoHS compliant)	Phosphor Bronze
Insulator material (RoHS compliant)	Nylon UL 94 V-0

How to order

BS x - xxx - R390 - 55 / X

