

Micro A Series 2~6Pin

CHOGORI®

Application

Signal connectors suitable for harsh environments

Advantages

- Quick plug in & out
- Poka-yoke design on contact surface
- Small size
- Overmolding structure, clean & flexible
- RoHS



Specification

Mating Cycle : ≥ 200 Times

Pullout Force : $> 30N$

Wire processing: Weld

Voltage Rating : 48V AC

Current Rating : 2A

Withstand Voltage : 300V DC

Insulation Resistance : $>20M\Omega$

Operating Temperature: $-25^{\circ}C \sim 80^{\circ}C$ Shell : TPU

IP Rating : IP66 Mated

Salt Spray : 48h



Flammability Rating : UL94V-0

Conductor : Copper Alloy, Gold Plated

Wire Gauge : 2-4Pin 24AWG/0.2mm²

5-6芯 26AWG/0.14mm²

Size

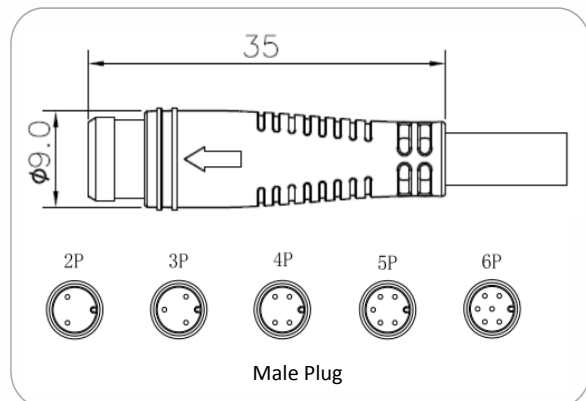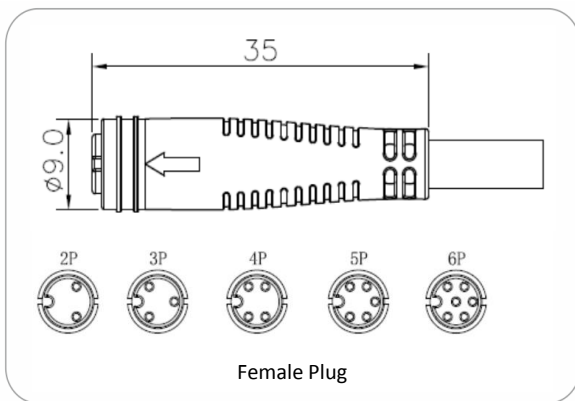

Connector Picture

