


Recommended Cable Detail

3

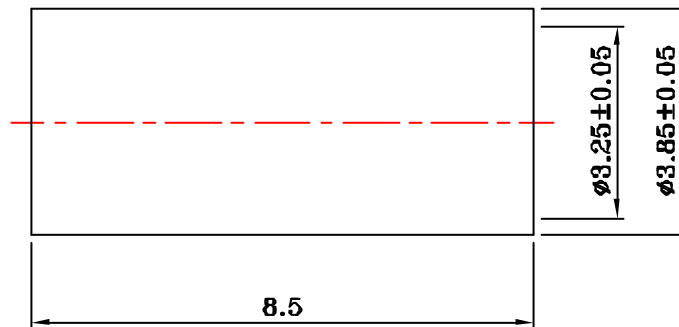

ELECTRICAL RATINGS:

1. Impedance : 50 ohms
2. Frequency Range : 0~6GHz
3. Working Voltage : 335 Vrms maximum
4. Dielectric Withstanding Voltage : 1000 Vrms maximum
5. Insulator Resistance : 1000 Megohms minimum

3	FERRULE	BRASS	GOLD	14A000-104
2	CONTACT	BE. COPPER	GOLD 30U*	04X002-105
1	INSULATOR	TEFLON	NONE	X601-000A1
	BODY (2)	BRASS	GOLD	
	BODY (1)	P.BRONZE	GOLD	
ITEM	DESCRIPTION	MATERIALS	FINISHED	PART NUMBER

REV.	DESCRIPTION	ECN	DRAWN	DATE
C	SEE ECN (M920306)	03-104	LUKE	03/06/2003
B	SEE ECN (M910836)	02-289	LUKE	08/19/2002
A	NEW RELEASE	02-070	TINA	03-11'2002
REVISIONS				

REMARKS:

TITLE: MCX STRAIGHT PLUG CRIMP TYPE
FOR RG174,188,316 CABLE

TOLERANCES:
DIM. XX=±0.3
UNIT: mm XXX=±0.15

DESIGNED: TINA
03-11'2002

DRAWN: TINA
03-11'2002

CHECKED:

APPROVAL:

SHEET: 1 OF 1

SCALE: 8:1

DWG NO.:

LAYER: ASY

REV. C

IO
INPUT OUTPUT
INDUSTRIAL CO., LTD.

P/No.: S - X601-010A